


# VBM

## Light Impact Vibrator

PERFORMANCE DATA								
MODEL		FREQUENCY	FORCE OUTPUT	UN-BALANCE	H P	AMP DRAW	STARTUP CURRENT MULTIPLIER	WEIGHT
		rpm	lbs	in-lbs	hp	Amp 115V		lbs
VBM1/36/70	Single-Phase	3600	68	0.19	0.040	0.25	0.6	3.5
						Amp 230V		
VBM3/36/70	Three-Phase	3600	68	0.19	0.055	0.29	0.7	3.5

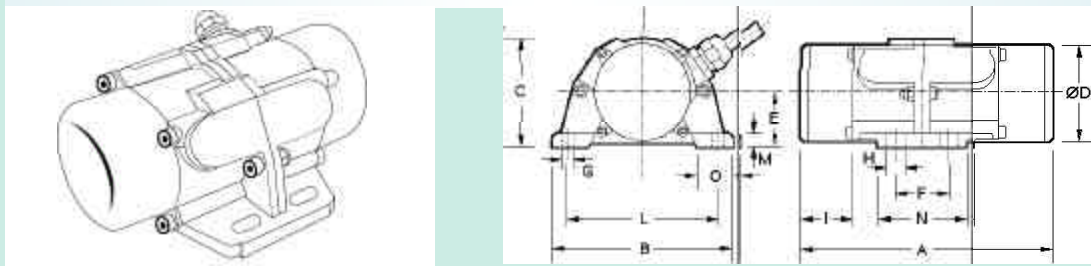

DIMENSIONS													
MODEL	A	B	C	D	E	F	G	H	I	L	M	N	O
VBM1/36/70	5.75	4.37	2.64	2.40	1.30	1.26	0.28	0.51	1.26	3.62	0.35	2.13	0.83
VBM3/36/70	5.75	4.37	2.64	2.40	1.30	1.26	0.28	0.51	1.26	3.62	0.35	2.13	0.83



*The VBM has been designed for all the applications where only a light force is required.*

*Lower noise (60 dba) and lower consumption (40 watts) makes it a viable alternative to many pneumatic vibrators.*

*Ideal for feeding, screening and compacting in pharmaceutical, food and chemical applications.*

*It comes standard with capacitor and 5' cable. Force is adjustable from 11 to 68 lbs.*

# POWTEK

ELECTRIC VIBRATION TECHNOLOGY

3060 BRISTOL ROAD  
SUITE 236  
BENSALEM, PA 19020  
TEL: 888-777-9462  
FAX: 215-702-1607